

## MIL-2H High Power Tactical HF Broadband Dipole - 2~30Mhz

**250W PEP / 125W Digital Voice/Data Modes**

Bushcomm's tactical HF Antennas are lightweight and uncompromising, ensuring compatibility with the world's most popular military transceivers.

Designed for quick deployment in Challenging conditions, the Tactical MIL-2H Broadband Dipole Antenna incorporates an advanced balanced loading design to provide controlled impedance across the HF band.

*This removes the need for an antenna tuner, and allows operation with frequency agile/frequency hopping communications modes.*

This 250W model is suitable for high duty cycle operation of 125W Digital Voice & Data enabled transceivers.

For operation, each side of the antenna is unwound to its full length. Throwing weights & cords are provided, which can be used to elevate the antenna.



Unpacked Tactical MIL-2H Broadband Dipole







Heavy Duty Load



High Impact UV Stablized Nylon Balun housing with recessed coaxial strain relief point

The versatility of this antenna is such that it can be used in a number of configurations, depending on structures available for elevation - See below.

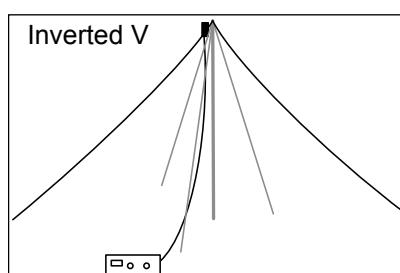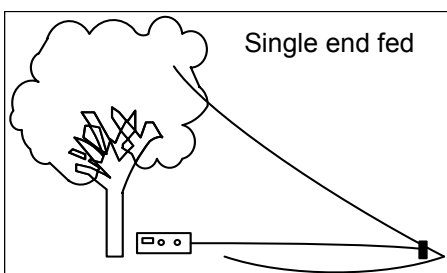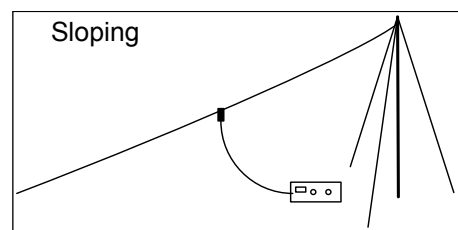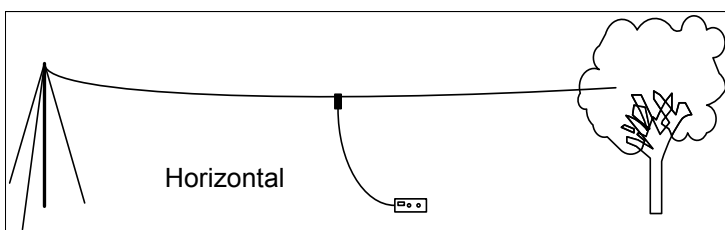

**SPECIFICATION**
**ELECTRICAL**

Frequency Range	2.0 - 30 MHz (Usable VSWR)
Maximum power rating	MIL-2H (BU01067) - 250w PEP / 125W Digital voice & data modes
Impedance	50 ohm

**MECHANICAL**

Material	Kevlar core, copper braid, pvc sheath, UV Stablized Re-inforced Nylon housings
Length	48m
Weight	1.6kg
Packed size	37cm x 18cm x 5cm
Connector	SO239 - Other RF terminations available

**SPECIAL FEATURES**

- 2.0 - 30 MHz frequency range
- True Broadband Design - No tuner required
- Light weight and packs away for easy transport
- Tough, durable, perfect for outdoor environments
- Flexible arrangements for deployment depending on environment
- Perfect for frequency agile transmitters

**VSWR**
